

塑封快恢复高压二极管


反向电压 4KV

正向电流 5mA

Plastic Fast Recover High Voltage Rectifier

Reverse Voltage 4KV

Forward Current 5mA

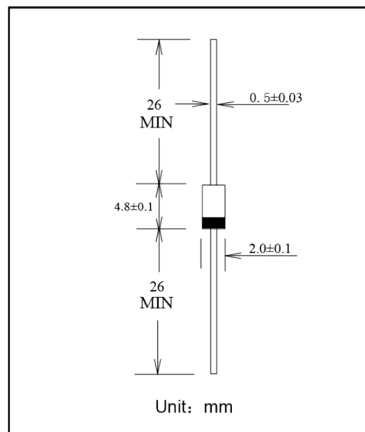

特征 Features

- 适用于高稳定显示器或电视接收机及办公类自动化设备
For high resolution displays or TV receivers and Working automation equipment
- 扩散结
Diffused-junction
- 具有良好的高温输出特性
Excellent high temperature output characteristics (Small leakage current at high temperature and excellent reverse characteristics)

极限值和温度特性 TA = 25℃ 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25℃ ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL04S	单位 Unit
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	4	KV
正向平均电流 Average Forward Current	$I_{F(AV)}$	5 (正弦半波50HZ, 电阻负载Ta=25℃) (50HZ half-sine wave, Resistance load Ta=25℃)	mA
正向(不重复)浪涌电流 Non-Repetitive Forward Surge Current	I_{FSM}	0.5 (正弦半波50HZ, 1/2周期, Ta=25℃) (50HZ half-sine wave, 1/2 cycle, Ta = 25℃)	A
工作环境温度 Ambient Temperature	T_{amb}	-40 --- +100	℃
最高结温 Maximum Junction Temperature	$T_{(vj)}$	120	℃
贮存温度 Storage Temperature	T_{stg}	-40 --- +120	℃

电特性 TA = 25℃ 除非另有规定。


Electrical Characteristics Ratings at 25℃ ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL04S	单位 Unit
正向压降 Forward Voltage Drop $I_F = 10mA$	V_F	15	V
常温反向漏电流 Normal Temperature Reverse Current $V_R = V_{RRM}$	I_{RM1}	2	μA
高温反向漏电流 High Temperature Reverse Current $T_A = 100℃ V_R = V_{RRM}$	I_{RM2}	5	μA
反向恢复时间 Reverse Recovery Time $I_F = 2mA, I_{rp} = 4mA$ 75% recovery	t_{rr}	100	nS

特性曲线 Characteristic Curves


正向特性曲线

TYPICAL FORWARD CHARACTERISTIC

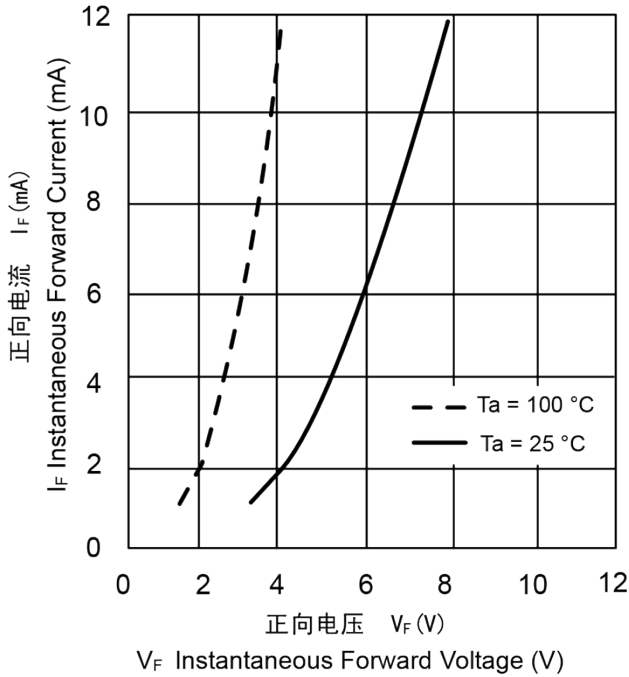


反向特性曲线

REVERSE CHARACTERISTIC [VR-IR]

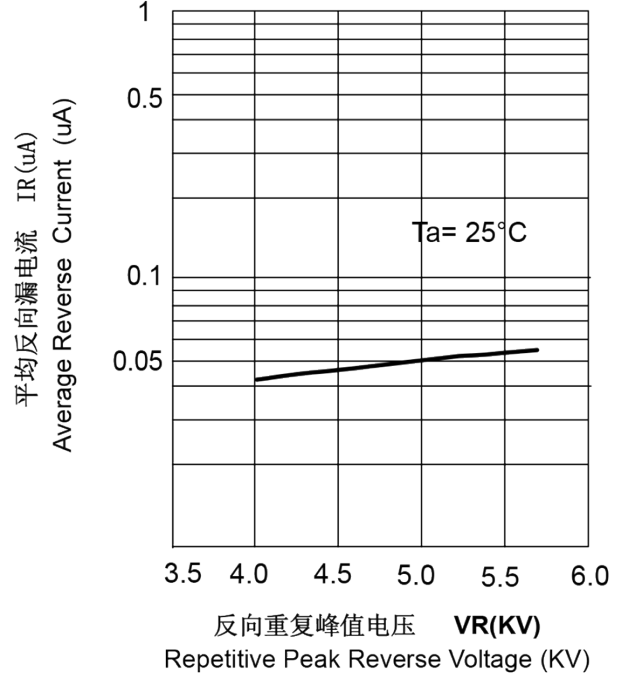

反向恢复时间特性

REVERSE RECOVERY TIME CHARACTERISTIC[T_a - T_{rr}]

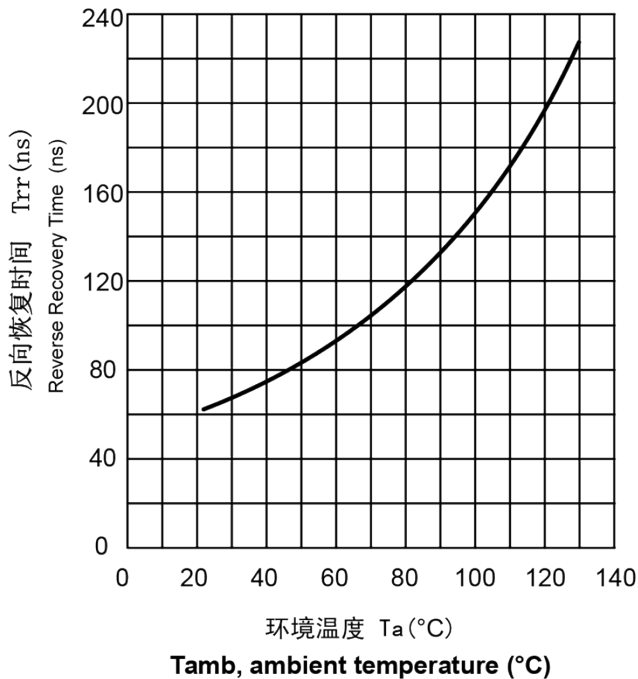

反向电压特性分布

REVERSE VOLTAGE CHARACTERISTIC DISTRIBUTION

